(19) World Intellectual Property Organization

International Bureau



(43) International Publication Date 19 May 2005 (19.05.2005)

PCT

(10) International Publication Number WO 2005/044061 A1

(51) International Patent Classification7:

A47F 5/08

(21) International Application Number:

PCT/DK2004/000783

(22) International Filing Date:

11 November 2004 (11.11.2004)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

PA 2003 1680 11 November 2003 (11.11.2003) DK

(71) Applicant (for all designated States except US): VKS IN-VENTA A/S [DK/DK]; Industrivej 1, Rødding, DK-7860 Spøttrup (DK).

(72) Inventors; and

- (75) Inventors/Applicants (for US only): SØRENSEN, Kim, Albech [DK/DK]; Nonbo Dal 24, DK-8800 Viborg (DK). KRISTENSEN, Morten [DK/DK]; Uglkæret 4, DK-7860 Spøttrup (DK). NIELSEN, Uffe, Thue [DK/DK]; Koustrupvej 8, Velling, DK-6950 Ringkøbing (DK).
- (74) Agent: PATRADE A/S; Fredens Torv 3A, DK-8000 Aarhus C (DK).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: SUSPENSION ARRANGEMENT

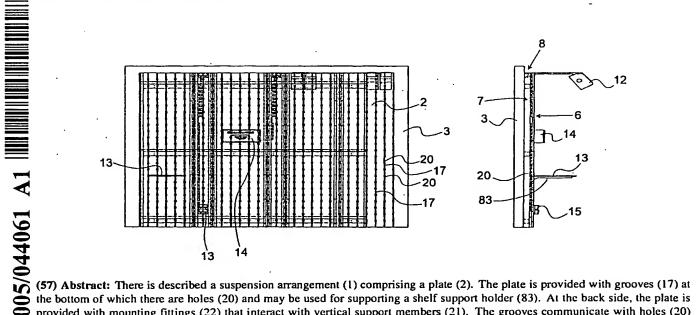

the bottom of which there are holes (20) and may be used for supporting a shelf support holder (83). At the back side, the plate is provided with mounting fittings (22) that interact with vertical support members (21). The grooves communicate with holes (20) along part of their length, the holes opening at the back side. The suspension fittings may hereby be mounted so that they extend through a hole (20) and bears with a first support part against the back side of the plate (2) and a second support part that bears against the bottom of the groove (17). As the grooves (17) may be disposed with arbitrary spacing, it becomes possible to dispose suspension fitting with very great flexibility with regard to mutual spacing and level on the plate.